

NEPTUNE RS 8000-10000VA

Microprocessor Relay Stabilizer/AVR



Features

- Single Phase Automatic Voltage Stabilizer/Relay-AVR
- Advanced Digital Microprocessor Technology
- Wide Input Voltage Range 220Vac -35/+20%
- LED Display Input Voltage, Output Voltage and Working Status
- Output Over&Under Voltage Protection
- Output Regulation 220Vac +/-8%/10%
- Short Circuit & Over Load Protection
- Selectable Output Delay Function 6/180 ms
- Built-in Toroid Transformer CRGO.
- High Efficiency Stabilizer >98%(CRGO)
- EMI & RFI Noise Filter After-60dB
- Surge, Spike and Lightning Protection Energy 320 Joules (8/20 μ S IC=6500A)
- Input / Output Terminal
- CE Certificate/ LVD:IEC60950, EMC:IEC55024
- ISO9001/ISO14001:2015 Manufacturer Certification



Digital μ P



CRGO



LED Display




Stabilizer/AVR

Application




NEPTUNE RS 8000-10000VA

Microprocessor Relay Stabilizer/AVR

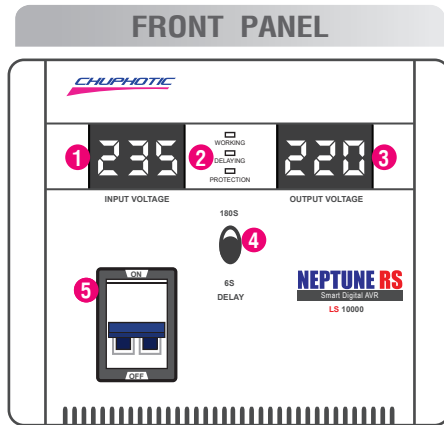

RS8000-RS10000

1. Input Voltage
2. LED status
3. Output voltage
4. Delay Output switch
5. Input switch/breaker

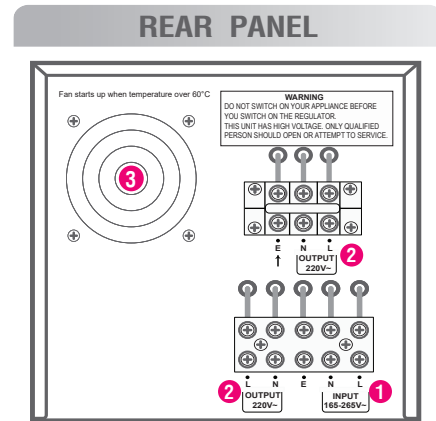

RS8000-RS10000

1. Input Terminal
2. Output Terminal
3. DC Fan

SPECIFICATIONS

Model		RS8000	RS10000
CAPACITY	VA/W	8000/6400	10000/8000
TECHNOLOGY	System	µP Relay Stabilizer with Toroid Transformer (CRGO)	
INPUT	Input Voltage	Single Phase, 220Vac (143-264V)	
	Input Frequency	45-65Hz (50/60Hz)	
OUTPUT	Output voltage	Single Phase, 220 Vac +/-8%/10%	
	Output Frequency	45-65Hz (50/60Hz)	
	Efficiency (%)	>98%	
	Output Delay	Selectable switch 6/180 ms	
PROTECTION	Outlets	Terminal (National Option)	
	Over/Under Voltage	Automatic cutoff	
	Overload/Short Circuit	Circuit Breaker	
	High Temperature	Fan speed automatic on temp.	
	Noise Filter	EMI&RFI Filter Full time suppression -60 dB	
	Clamping voltage	370Vpeak/1,000,000W : 100 µs	
CONNECTION	INLET / OUTLET	Terminal	
INDICATOR	LED Display	Input Voltage, Output Voltage and working Status	
STANDARD	Safety/EMC	CE : LVD IEC60950, EMC IEC55024	
	Manufacturer	QMS : ISO9001:2015, ISO14001:2015	
ENVIRONMENT	Temperature	0-45 °C	
	Humidity	0-95%(Non-Condensing)	
	Attenuation	Less than 40dB(at 1 meter)	
PHYSICAL	Dimension(WxDxH)mm	220x340x245	
	Weight(Kg)	37	

*All specification are subject to change without prior notice.

Chuphotic.BRO-06.Stabilizer.Neptune RS 8000-10000.Rev1.10/2019

บริษัท ยูไฟท์ค จำกัด

949 หมู่ 9 ต.ลำโพงเหนือ อ.เมืองสมุทรปราการ จ.สมุทรปราการ 10270

โทรศัพท์: 02 186 3010 แฟกซ์: 02 186 3018-9

www.chuphotic.com

E-mail: ups@chuphotic.com

ตัวแทนจำหน่าย :