

VRLA / SLA Battery series is designed with AGM (Absorbent Glass Mat). In High Performance Plate with Anticorrosion Powder in Purify Electrolyte. Innovation Design of Fully Maintenance Free in Float Life 5 years. This is Highly Suited to Backup Applications in UPS/EPS, Security Alarm System, Emergency Light and other in Extremely High Power output 15%

Feature

- Smart UPS Battery Design up to 15%
- Battery Capacity 21Ah / 750W-5min
- AGM/SLA - Seal Lead Acid Battery
- Maintenance Free Battery Operation
- Non-Spillable Construction Design
- ABS container & Cover UI94HB-0
- Safety Value in explosion proof
- CE & UL Product Certification
- ISO9001 & ISO14001 Certified Factory

Application


- UPS & EPS
- Emergency System
- Communication Eq.
- Security System
- Control Equipment
- Solar System
- Medical Equipment
- Cable TV & CCTV

Specifications


Voltage Normal	: 12 VDC in 6 Cell
Capacity @20Hr	: 21Ah @0.96A/ 12W
@ 5Hr	: 17Ah @3.29A/ 38W
@ 1Hr	: 12.6Ah @12.2A/ 135W
@15min	: 9.2Ah @36A/ 410W (*UPS)
@ 5min	: 6.0Ah @67A/ 750W (*UPS)
Max. Discharge	: 300A @14C
Max. Charge Current	: 6.0A @0.3C
Internal Resistance	: Apporx. 15 mΩ Full Charge at 25°C
Design Float Life	: 5 years at 25 °C
Cycle Lift Service	: 1500 cycles at DOD 25%
Float Charge Voltage	: 13.5-13.8V (-20mV/°C) at 25°C
Cycle Charge Voltage	: 14.4-15.0V (-30mV/°C) at 25°C
Operation Temp.	: Normal 25+ / -3 °C
	: Discharge -15 – 50 °C
	: Charge -15 – 50 °C
	: Storage -15 – 50 °C
Self Discharge	: more than 6 Month at 25°C
Terminal	: T12-M5
Container Material	: ABS UL94 HB-0 (Option :UL94V-0)
Physical	: 181x76x167mm – 5.5 Kgs




Dimension 181x76x167mm Weight = 5.5kgs @T12m5

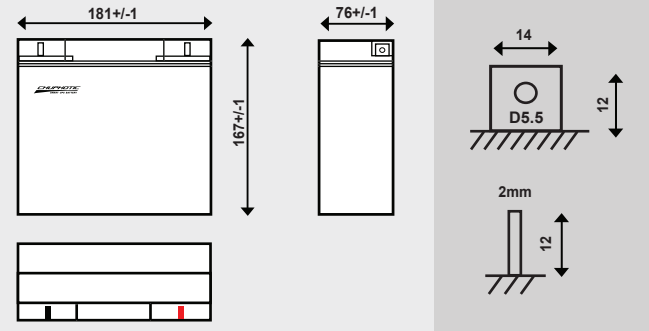


Terminal Voltage (V) and Discharge Time

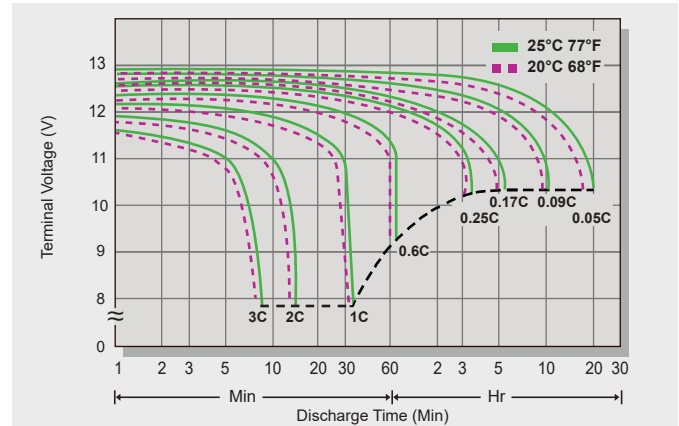


Battery Voltage and Charge Time for Standby Use

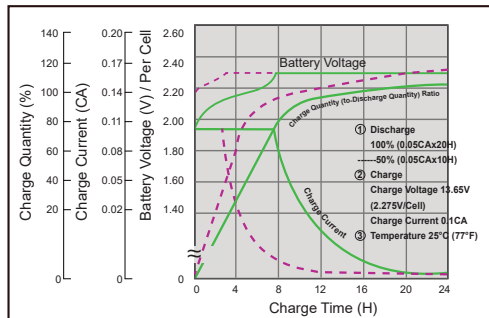

Battery Voltage and Charge Time for Cycle Use

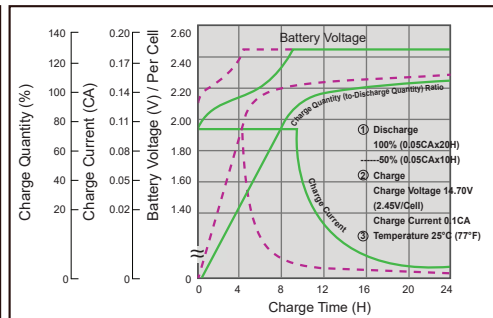

Cycle Service Life

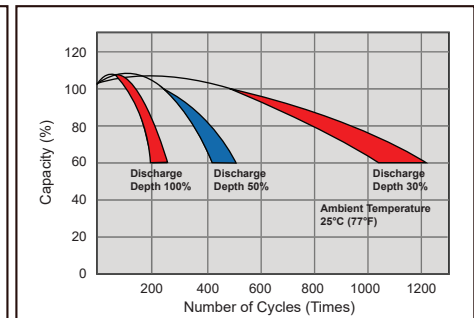

Constant Current(Amp) and Power (Watt/Box) Discharge Table

Chuphotic.BRO-10.BATT UB1221-750W 12V-21Ah.Rev1.10/2019

VRLA-Battery Performance : %DOD, Constant Current, Constant Power (25°C / 10.2 F.V.)

Discharge Time	5 Min	10Min	15Min	20Min	30Min	60Min	2Hr	3Hr	5Hr	10Hr	20Hr
%DOD	30%	40%	46%	48%	52%	63%	68%	78%	83%	87%	100%
Cons. Current	72A	48A	36.8A	28.8A	20.8A	12.6A	6.8A	5.2A	3.6A	1.48A	0.90A
Cons. Power	750W	540W	410W	300W	230W	135W	75W	56W	39W	22W	12W