

VRLA / SLA Battery series is designed with AGM Long life/Duration In High Performance Plate with Gain Extra Powder in Purify Electrolyte. Innovation Design of Fully Maintenance Free in Float Life 12 years. This is Highly Suited to Backup Applications in UPS/EPS, Security Alarm System, Deep Cycle Applications use in Telecom System and Solar System.

Feature

- Smart UPS Battery Design up to 15%
- Battery Capacity 200Ah / 3400W - 15min
- AGM/SLA - Seal Lead Acid Battery
- Maintenance Free Battery Operation
- Non-Spillable Construction Design
- ABS container & Cover UL94HB-0
- Safety Value in Explosion proof
- CE & UL Product Certification
- ISO9001 & ISO14001 Certified Factory

Application


- UPS & EPS
- Emergency System
- Communication Eq.
- Control Equipment
- Solar System
- Alarm System
- Medical Equipment
- Cable TV & CCTV
- Solar System




Specifications

Voltage Normal	: 12 VDC in 6 Cell
Capacity @20Hr	: 212Ah @10.6A/ 127W
@ 5Hr	: 170Ah @33.9A/ 426W
@ 1Hr	: 125Ah @125 A/ 1458W
@15min	: 77Ah @310 A/ 3408W (*UPS)
@ 5min	: 44Ah @532 A/ 5712W (*UPS)
Max. Discharge	: 2800A @14C
Max. Charge Current	: 60A @0.3C
Internal Resistance	: Apporx. 3 mΩ Full Charge at 25°C
Design Float Life	: 12 years at 25 °C
Cycle Lift Service	: 1500 cycles at DOD 25%
Float Charge Voltage	: 13.5-13.8V (-20mV/°C) at 25°C
Cycle Charge Voltage	: 14.4-15.0V (-30mV/°C) at 25°C
Operation Temp.	: Normal 25+ / -3 °C
	: Discharge -15 – 50 °C
	: Charge -15 – 50 °C
	: Storage -15 – 50 °C
Self Discharge	: more than 6 Month at 25°C
Terminal	: M6
Container Material	: ABS UL94 HB-0 (Option :UL94V-0)
Physical	: 522x238x221mm – 61 Kgs

Dimension 522x238x221mm Weight = 61kgs @M6

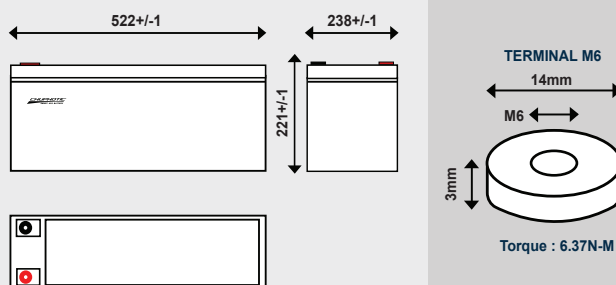




Terminal Voltage (V) and Discharge Time

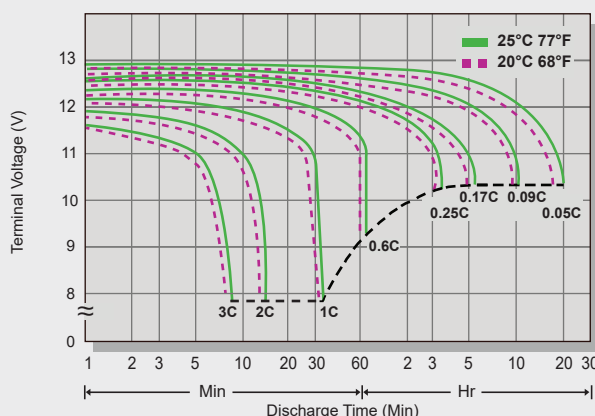

Battery Voltage and Charge Time for Standby Use

Battery Voltage and Charge Time for Cycle Use

Cycle Service Life

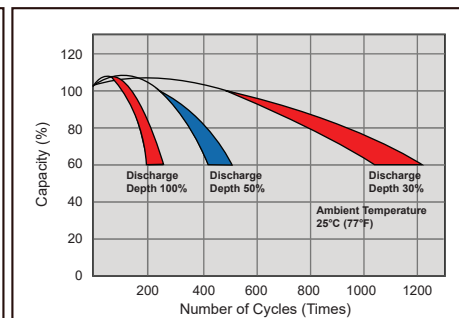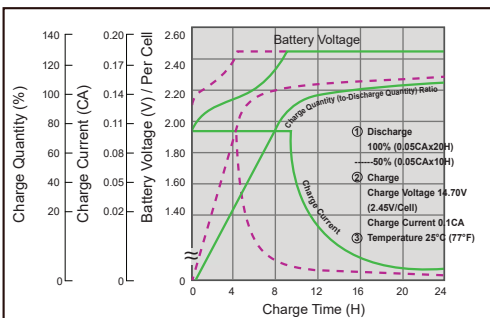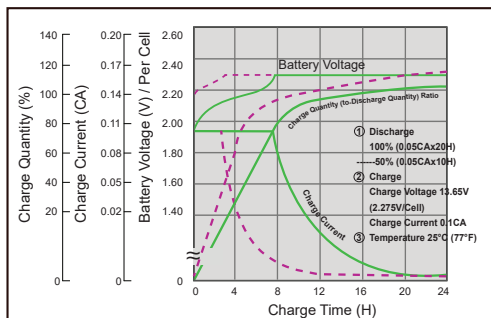

Constant Current(Amp) and Power (Watt/Box) Discharge Table

CHU.BRO-13.BAT.UB12200-3400W.Rev1.00/2020

VRLA-Battery Performance : %DOD, Constant Current, Constant Power (25°C / 10.2 F.V.)

Discharge Time	5 Min	10Min	15Min	20Min	30Min	60Min	2Hr	3Hr	5Hr	10Hr	20Hr
%DOD	22%	32%	39%	42%	49%	62%	70%	81%	85%	100%	106%
Cons. Current	532A	390A	310A	252A	196A	125A	70A	54A	34A	20.0A	10.6A
Cons. Power	5712W	4296W	3408W	2770W	2208W	1458W	805W	618W	426W	240W	127W